


FIRE RATED POWER CABLES



AUSTRALIA PACIFIC ELECTRIC CABLES

0.6 / 1 kV to AS/NZS 5000.1
Plus, AS/NZS 3013

Four Core Circular
Plus, Insulated Earth
With Mica Tape

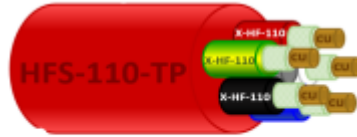

Conductor: Plain annealed copper

Insulation: X-HF110

Flame barrier: Mica tape

Sheath: HFS-110-TP

compounds for continuous
conductor temperature of 110°C.

Low Smoke Zero Halogen

Standard Colours

Cores: Red, White, Blue,
Black, Green/Yellow

Sheath: Red

Power			Earth				
Nominal Conductor Area	Rating	Average Insulation thickness	Nominal conductor area	Average Insulation thickness	Approx. overall diameter	Approx. mass	Product Code
mm ²		mm	mm ²	mm	*mm	kg/100m	
					*Please note; Tolerance of approx. ± 10% will apply	*Please note; Tolerance of approx. ± 10% will apply	
10	WS52W	0.7	4	0.7	20.8	76.7	FRF010E04
16	WS52W	0.7	6	0.7	24.9	106.0	FRF016E04
25	WS52W	0.9	6	0.7	28.2	151.2	FRF025E04
35	WS52W	0.9	10	0.7	32.7	207.1	FRF035E04

Brisbane Office and Factory

89 Platinum Street,
Crestmead, Qld 4132
P: 07 3802 3651
E: bnesales@apeccables.com.au

Melbourne Sales & Distribution

188 Holt Parade,
Thomastown, VIC 3074
P: 03 9465 1188
E: salesmdc@apeccables.com.au

Perth Sales & Distribution

638 Casella Place
Kewdale, WA 6105
P: 08 9350 1300
E: salespdc@apeccables.com.au