


FLEXIBLE XLPE 110 DEGREES



AUSTRALIA PACIFIC ELECTRIC CABLES

Cu Class 5 / X-HF-110 /
HFS-110-TP 0.6/1KV to AS/NZS 5000.1

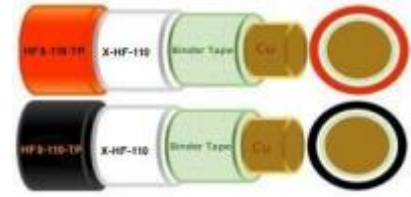

Standard Colours

Insulation: White
Sheath: Orange

Conductor: Plain Annealed Copper Class 5.
Insulation: X-HF-110 to AS/NZS 3808
Sheath: HFS-110-TP to AS/NZS 3808

Nominal conductor area mm ²	Average Insulation thickness mm	Average Sheath thickness mm	Approx. overall diameter mm	Approx. mass kg/100m	Product Code
16	0.7	1.4	10.2	22.9	FXV016WOHFS110
25	0.9	1.4	11.9	34.8	FXV025WOHFS110
35	0.9	1.4	13.7	46.1	FXV035WOHFS110
50	1.0	1.4	15.5	60.0	FXV050WOHFS110
70	1.1	1.4	17.2	81.6	FXV070WOHFS110
95	1.1	1.5	18.9	106.8	FXV095WOHFS110
120	1.2	1.5	21.0	133.2	FXV120WOHFS110
150	1.4	1.6	23.2	165.7	FXV150WOHFS110
185	1.6	1.6	25.5	201.5	FXV185WOHFS110
240	1.7	1.7	28.9	256.7	FXV240WOHFS110
300	1.8	1.8	31.6	316.5	FXV300WOHFS110
400	2.0	1.9	36.0	411.6	FXV400WOHFS110
500	2.2	2.0	39.9	525.1	FXV500WOHFS110
630	2.4	2.2	45.5	651.4	FXV630WOHFS110

Brisbane Office and Factory

89 Platinum Street,
Crestmead, Qld 4132
P: 07 3802 3651
E: brisesales@apeccables.com.au

Melbourne Sales & Distribution

188 Holt Parade,
Thomastown, VIC 3074
P: 03 9465 1188
E: salesmdc@apeccables.com.au

Perth Sales & Distribution

638 Casella Place
Kewdale, WA 6105
P: 08 9350 1300
E: salespdc@apeccables.com.au